



TSUN GEN3 Microinverter

TSOL-MS600 TSOL-MS700 TSOL-MS800



Maximized Efficiency

Individual optimization, se-parate dedicated MPPT for each panel.

New topology design, max. efficiency up to 96.7%.

Flexibility

Suitable for TSOL-ESK series AC module solution.

Plug & play installation, Easy to install.

Safety

Max. DC voltage 60V. No threat for high DC voltage.

Integrated LoM protection function. Ensure the safety of power grid.

Reliability

Die casting design and glue filling technology. Better thermal dissipation.

Standard 12 years warranty, Quality guaranteed.

CE VDE 0126 VDE 4105 EN 50549 INMETRO RD 1699 G 98

TSUNESS Co., Ltd

sales@tsun-ess.com www.tsun-ess.com +86-512-66186028

Technical Data

Model	TSOL-MS600	TSOL-MS700	TSOL-MS800
Input(DC)			
Recommended Module Power [W]	300-550+	300-550+	300-550+
Start up Voltage [V]	22	22	22
MPPT Voltage Range [V]	16-60	16-60	16-60
Max. Input Voltage [V]	60	60	60
Max. Input Current per Input (A)	14	14	14
Max. Input Short-circuit Current[A]	20	20	20
Quantity of MPPT	2	2	2
Output (AC)			
Max. Continuous Output Power [VA]	600	700	800
Nominal Continuous Output Power [W]	600	700	800
Nominal Output Current [A]	2.61	3.04	3.48
Max. Output Current [A]	3	3.19	4
Nominal Output Voltage [V]	220/230/240(175~270), L/N/PE		
Nominal Frequency [Hz]	50/60		
Power Factor	>0.99 default, 0.8 leading ... 0.8 lagging		
Output Current Harmonic Distortion	<3%		
Max. Units Per Branch (12AWG)	11	9	8
Max. Units Per Branch (10AWG)*	15	13	11


※ 10 AWG cable is optional, please contact TSUN for more details

Efficiency			
Peak Inverter Efficiency	96.7%		
CEC Weighted Efficiency	96.5%		
Nominal MPPT Efficiency	99.9%		
EU Efficiency	96.3%		
Night Time Power Consumption [mW]	< 50		


Mechanical Data			
Dimensions [WxHxD mm]	250*223*30		
Weight [kg]	3.1		
Pallet	120		
Type of Enclosure	IP67		
Cooling	Natural Convection		
AC Cable	2.43m		

Environmental Data			
Operating Ambient Temperature Range [°C]	-40 °C to 65°C		
Operating Internal Temperature Range [°C]	-40 °C to 85°C		
Relative Humidity	0-100% condensing		
Max. Operating Altitude Without Derating [M]	2000		
Monitor	Integrated WiFi (Optional)		

Diagram

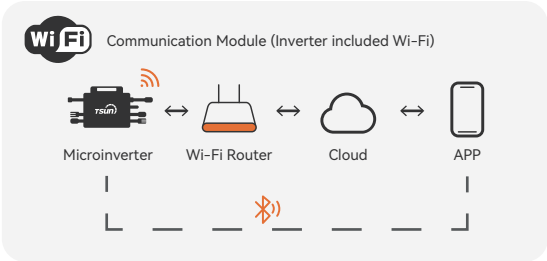

Optional Accessories

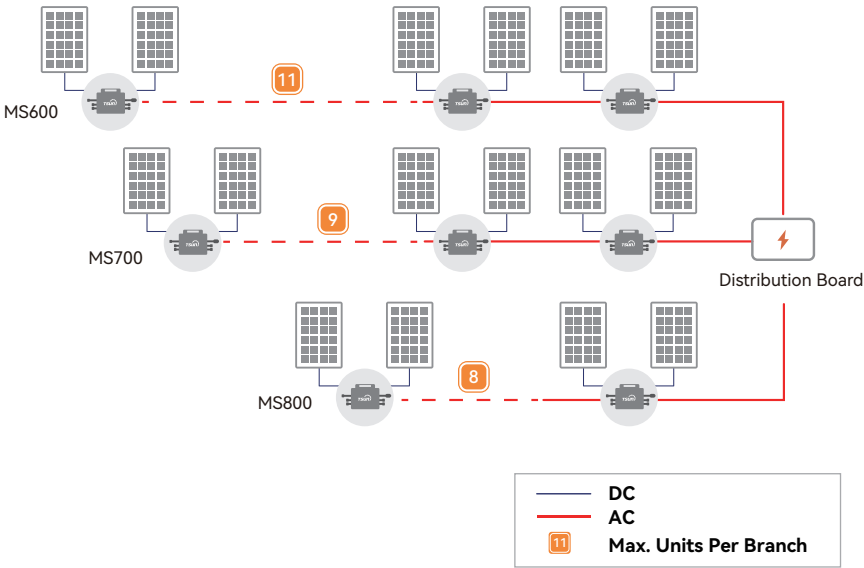

For more information, please contact us at www.tsun-ess.com

©2024 TSUNESS. All rights reserved. All specifications are subject to change without prior notice.

updated on 25th July, 2024